


# DHI- XVR4216/32AN-S2

16/32 Channel Penta-brid 720P Digital Video Recorder



- Embedded processor
- Support HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 16+2/16 channels IP camera inputs
- Max 72/64Mbps Incoming Bandwidth
- Long transmission distance over coax cable
- Support 2 SATA HDD, up to 16TB

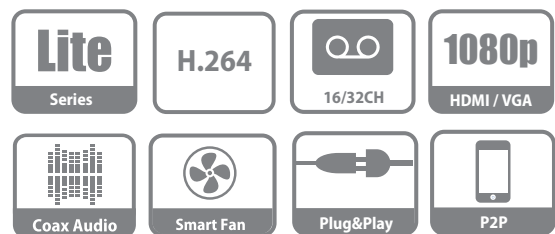

## System Overview

Dahua, as a technology leader, is always the first ever developed the shining new technology in the security industry ,and today we present XVR-S2 Series. As the perfect solution to upgrade existing video surveillance systems, XVR supports penta-brid access technology such as HDCVI, AHD, TVI, CVBS and IP to effortlessly integrate with popular industry formats, offering an affordable solution loaded with flexible options. It supports up to 16/32 channels of HDCVI/ AHD/TVI/CVBS inputs or 16+2/16 channels IP camera inputs.

Designed as a full compatibility product, XVR is able to provide end user the simplicity of analog system, namely lower system cost, simple installation and use of existing cable. It is ideal for a wide range of applications such as public safety, retail store, transportation, home protection and education.

## Functions

### HDCVI/AHD/TVI/CVBS Auto-detect

The XVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

### 5MP Resolution

The XVR supports up to 5MP HD resolution (2560 x 1920) IPC input for recording, live viewing.

### Coaxial Audio/Upgrade/Alarm

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

### Smart Fan

The smart fan can automatically turn on or turn off according to the CPU temperature. This function can effectively reduce the fan noise to provide a better user experience while extending the life of the fan at the same time.

### Spot Output (XVR4232AN-S2)

It is made for a secondary monitor. This allows the operator to view one special monitor that assigned to selected cameras or video inputs from higher security areas.

### Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

### Perfect Image Quality

High performance chip provides perfect image quality with better color reproduction.

### P2P

Monitor at anytime and anywhere. Easily and conveniently manage the device.

## Technical Specification

### System

Main Processor	Embedded Processor
Operating System	Embedded LINUX

### Video and Audio

Analog Camera Input	16/32 Channel, BNC
HDCVI Camera	1080P@25/30fps, 720P@25/30fps
AHD Camera	1080P@25/30, 720P@25/30fps
TVI Camera	1080P@25/30, 720P@25/30fps
CVBS Camera	PAL/NTSC
IP Camera Input	16+2/16 Channel, each channel up to 5MP
Audio In/Out	1/1, RCA
Two-way Talk	Reuse audio in/out, RCA

### Recording

Compression	H.264
Resolution	1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF
Record Rate	Main stream: 1080N(1~12fps)/720P(1~15fps)/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps) Sub stream: CIF/QCIF(1~7fps)
Bit Rate	1Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec

### Display

Interface	16CH:1 HDMI, 1 VGA, 32CH:1 HDMI, 1 VGA, 1 TV
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Multi-screen Display	16CH: When IP extension mode not enabled:1/4/8/9/16 When IP extension mode enabled:1/4/8/9/16/25 32CH:1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording

### Network

Interface	16CH:1 RJ-45 Port (100M) 32CH:1 RJ-45 Port (1000M)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Support Dahua IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 2.42, CGI Conformant

### Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis
Alarm input	N/A
Relay Output	N/A

### Playback and Backup

Playback	1/4/9/16
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

### Storage

Internal HDD	2 SATA Port, up to 8TB capacity
eSATA	N/A

### Auxiliary Interface

USB	16CH:2 USB 2.0 32CH:1 USB 2.0 , 1 USB 3.0
RS232	N/A
RS485	1 Port, for PTZ Control

### Electrical

Power Supply	16CH: DC12V/4A 32CH: DC12V/5A
Power Consumption	16CH:<15W (Without HDD) 32CH: <20W (Without HDD)

### Construction

Dimensions	1U, 375mm×287mm×53mm (14.8" x 11.3" x 2.1")
Net Weight	2.35kg (5.2 lb) (without HDD)
Gross Weight	3.2kg (7.05lb)
Installation	Desktop installation

### Environmental

Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 0~ 90% RH
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F) , 0~ 90% RH

### Third-party Support

Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
---------------------	---


### Certifications

Certifications	FCC: Part 15 Subpart B CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 UL: UL 60950-1
----------------	--

**Ordering Information**


Type	Part Number	Description
16 Channel XVR	DHI-XVR4216AN-S2	16 Channel Penta-brid 720P 1U Digital Video Recorder
32 Channel XVR	DHI-XVR4232AN-S2	32 Channel Penta-brid 720P 1U Digital Video Recorder

**Dimensions (mm)**

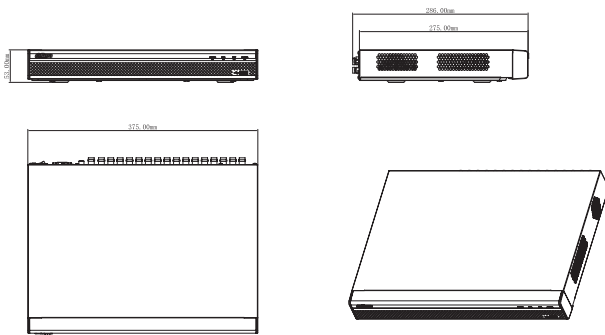


**Rear Panel**

DHI-XVR4216AN-S2

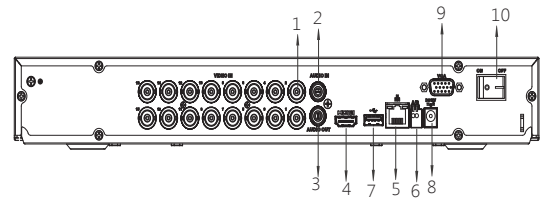

- 1 VIDEO IN
- 2 AUDIO IN, RCA Connector
- 3 AUDIO OUT, RCA Connector
- 4 HDMI Interface
- 5 Network Interface
- 6 RS485 Interface
- 7 USB Interface
- 8 DC 12V Power Input
- 9 VGA Interface
- 10 Power Switch

DHI-XVR4232AN-S2

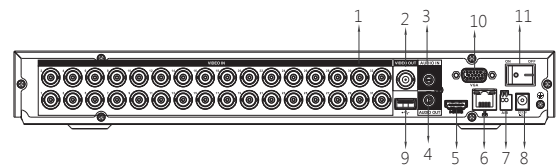

- 1 VIDEO IN
- 2 VIDEO OUT
- 3 AUDIO IN, RCA Connector
- 4 AUDIO OUT, RCA Connector
- 5 HDMI Interface
- 6 Network Interface
- 7 RS485 Interface
- 8 DC 12V Power Input
- 9 USB Interface
- 10 VGA Interface
- 11 Power Switch