

## DS-KAB03-V Protective Shield

### Features and Notes

- Stainless steel material
- Convenient design available for the wall mounting of the villa door station (DS-KV8102-IP/VP)
- No insulation




### Available Model

DS-KAB03-V


### Specifications

Parameter	Model	DS-KAB03-V
Material		Stainless Steel
Working temperature		-40° C to +70° C (-40° F to 158° F)
Working humidity		10% to 90%
Dimension (L x W x H)		172.3 mm × 100 mm × 71 mm (6.78" × 3.94" × 2.8")


### Dimension

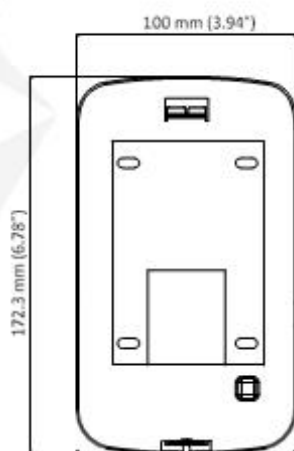

Front View

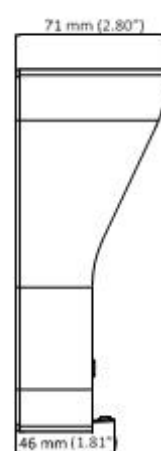


Side View

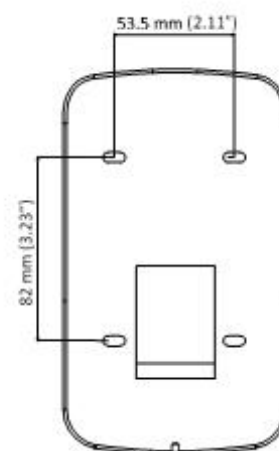


Rear View




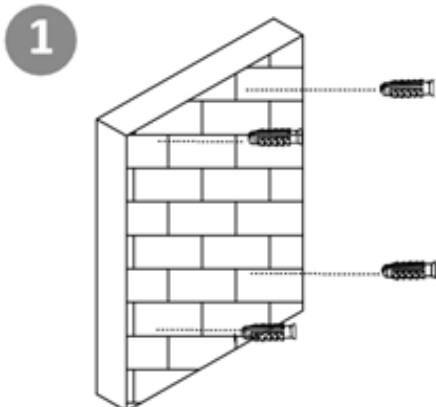

1 Insert 4 expansion tubes into the wall.

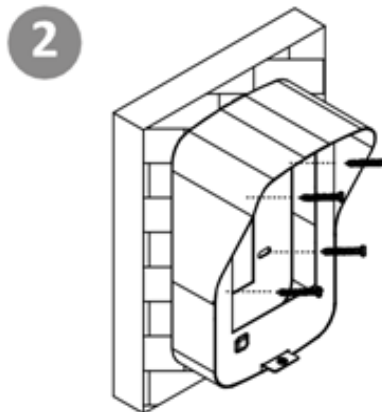


2 Fix the protective shield on the wall with 4 screws.

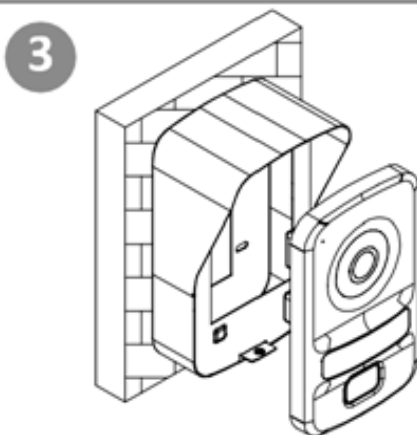

3 Install the door station into the protective shield.

Distributed by

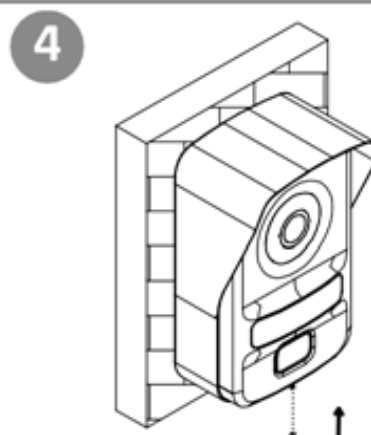

4 Secure the door station with a set screw.

## HIKVISION®

### Headquarters

No.555 Dianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998

Hikvision USA  
T +1-909-895-0400

Hikvision Europe  
T +31-23-55-42-770

Hikvision Middle East  
T +971-4-8816086

Hikvision Russia  
T +7-495-669-67-99

Hikvision India  
T +91-22-28469900

Hikvision Italy  
T +39-0438-6902

Hikvision France  
T +33(0)1-85-330-450

Hikvision Spain  
T +34-91-737-16-55

Hikvision Poland  
T +48-22-460-01-50

Hikvision UK  
T +01628-902140

Hikvision Singapore  
T +65-6684-4718

Hikvision Oceania  
T +61-2-8599-4233

Hikvision Canada  
T +1-909-895-0400

Hikvision Korea  
T +82-31-731-8841

Hikvision Brazil  
T +55 11 3318-0050

Hikvision Africa  
T +27 (10) 0351172

Hikvision Hong Kong  
T +852-2151-1761