

MET-200

SURFACE MOUNT CONTACTS

**MET-202C AR-WP18 (Water Resistant - SPDT)

2"Lx.74"Wx.37"H Surface Mount Armored Commercial Type W/Wire Leads or Armored Cable



Contact Size: 2"Lx.74"Wx.37"H

(51mmx18.8mmx9.5mm)

Standard Magnet Size: 2"Lx.74"Wx.37"H

(51mmx18.8mmx9.5mm)

Standard Gap: 1.25"(32mm)

Colors: Aluminum Case

18"(458mm) Armor Cable Standard (MET-200AR)

36"(915mm) Armor Cable Available (MET-200AR 36")

12"(305mm) 22AWG Leads Standard (MET-200)

Specifications





| Part Number | Gap Inch(mm) | Loop Open/Closed | Reed Form | Max. Contact Rating (W) | Max. Initial Contact Resistance (mΩ) | Max. Switching Voltage (V) | Max. Switching Current (A) |
|------------------------|-----------------|---------------------|--------------------|----------------------------|---|-------------------------------|-------------------------------|
| MET-200 | 1.25"(32) | CLOSED | Normally Open | 10 | 100 | AC110/DC100 | 0.5 |
| MET-200 AR | 1.25"(32) | CLOSED | Normally Open | 10 | 100 | AC110/DC100 | 0.5 |
| MET-201B | 1.18"(30) | OPEN | Normally Closed | 3 | 100 | AC30/DC30 | 0.2 |
| MET-201B AR | 1.18"(30) | OPEN | Normally Closed | 3 | 100 | AC30/DC30 | 0.2 |
| MET-202C | 1.18"(30) | SPDT | SPDT | 3 | 100 | AC30/DC30 | 0.2 |
| MET-202C AR | 1.18"(30) | SPDT | SPDT | 3 | 100 | AC30/DC30 | 0.2 |
| **MET-202C AR -WP18 | 1.18"(30) | SPDT | SPDT | 3 | 100 | AC30/DC30 | 0.2 |

OPERATING TEMPERATURE:-40°C to +60°C

Outline Dimensions

Unit: inch(mm)

MET-200 AR/MET-201B AR

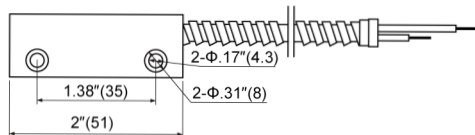

The Best Product Guarantee since 1984®

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com




MET-200

SURFACE MOUNT CONTACTS


Outline Dimensions

Unit: inch(mm)


MET-200/MET-201B

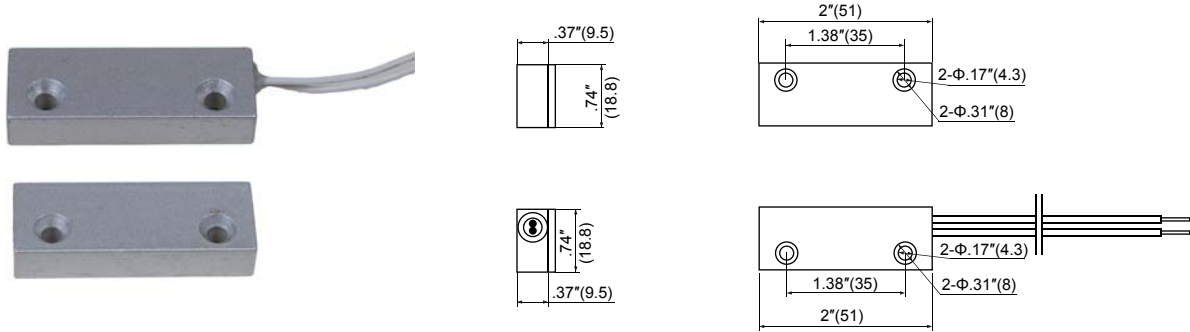

MET-202C AR

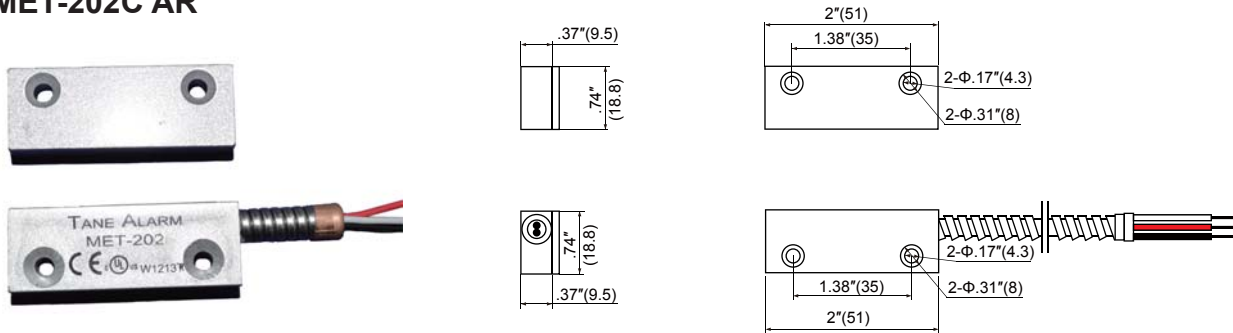

MET-202C

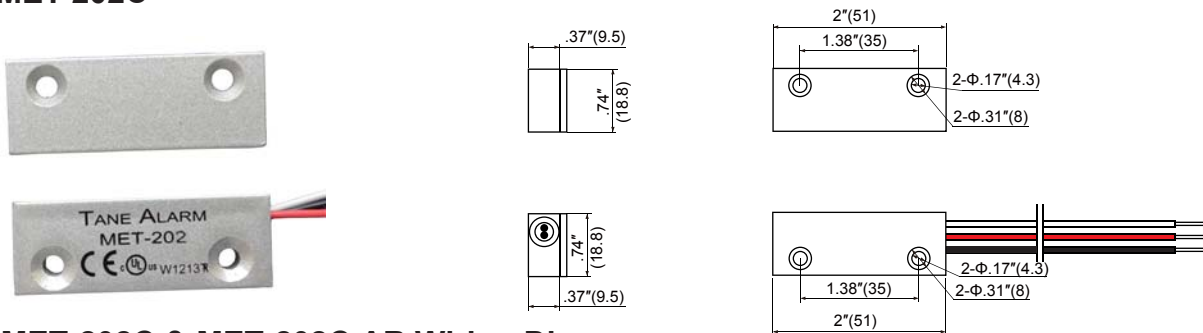

MET-202C & MET-202C AR Wiring Diagram

