

## DS-2CD2620F-I(S) (2.0MP)/DS-2CD2632F-I(S) (3MP)


### VF IR Bullet Network Camera



#### Key features

- 2.0MP / 3MP high resolution
- HD real-time video
- Vari-focal lens
- IR range: up to 30m
- DWDR & 3D DNR & BLC
- IP66
- Onboard storage (up to 64GB)
- (-S) Audio I/O, Alarm I/O

#### Dimensions

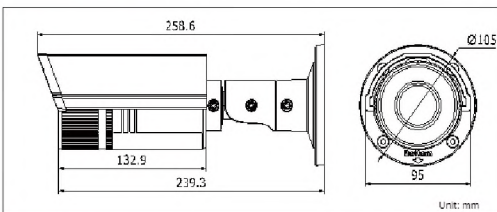

#### Accessories



DS-1275Z-J  
Vertical pole mount



DS-1260Z-J  
Junction box

#### Available models

DS-2CD2620F-I, DS-2CD2620F-IS  
DS-2CD2632F-I, DS-2CD2632F-IS

\* -S: 2-ch audio I/O interface, 2-ch alarm I/O interface

	DS-2CD2620F-I (S)	DS-2CD2632F-I (S)
<b>Camera</b>		
Image sensor	1/3" Processor EXMOR CMOS TI DAVINCE Linux processor	
Min. illumination	0,2 lux F1.2 Color, 0.01 lux F1.2 p&b, 0 lux with IR AGC / ATW Auto/Manual	
Shutter time	1/3s ~ 1/100,000s	
Lens	2.8~12 mm@F1.4, angle of view: 98.4°~30.2°	2.8 - 2 mm@ F1.4, Angle of view: 91.2°-28.3°
Lens mount	Φ14	
Day & night	ICR	
Digital noise reduction	3DDNR	
Wide dynamic range	Digital WDR	
Backlight	Yes, zone confi	
Compensation	Standard	
Video compression	H.264 / MJPEG	
H.264 codec profi	Main profi	
Bit rate	32Kbps ~ 12Mbps	
Audio compression	G.711 / G.722.1 / G.726 / MP2L2	
Audio bit rate	64 Kbps (G.711) / 16Kbps (G.722.1) / 16 Kbps (G.726) / 32-128 Kbps (MP2L2)	
<b>Image</b>		
Max. Image Resolution	1280 × 960	2048 × 1536
Frame rate	50 Hz: 25 fps (1280 × 960), 25 fps (1280 × 720), 25 fps (704 × 576), 25 fps (640 × 480) 60 Hz: 30 fps (1280 × 960), 30 fps (1280 × 720), 30 fps (704 × 576), 30 fps (640 × 480), 30 fps (704 × 480), 30 fps (352 × 240) NTSC	50 Hz: 20 fps (2048 × 1536), 25 fps (1920 × 1080), 25 fps (1280 × 720) 60 Hz: 20 fps (2048 × 1536), 30 fps (1920 × 1080), 30 fps (1280 × 720) NTSC
Image settings	Rotate mode, Saturation, brightness, contrast, sharpness adjustable through client software or web browser	
ROI	Support	
<b>Network</b>		
Network storage	NAS (Support NFS, SMB/CIFS)	
Alarm trigger	Line Crossing, Intrusion Detection, Motion detection, Tampering alarm, Storage exception	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour	
System compatibility	ONVIF, PSIA, CGI, ISAPI, IE, Chrome, Mozilla, IOS, Android, Windows Phone	
General functionalities	Flickerless, heartbeat, mirror, privacy mask, watermark, IP address filtering, Anonymous access, 10 Users	
<b>Interface</b>		
Communication Interface	1 RJ45 10M/100M Ethernet port / Bnc Connection	
Onboard storage	Built-in Micro SD/SDHC/SDXC card slot, up to 64GB	
<b>General</b>		
Operating conditions	-30°C ~ 90°C humidity 95% or less (non-condensing), Protection surge	
Power supply	12VDC ± 10%, PoE (802.3af)	
Power consumption	Max. 5.5W (7.5W with ICR on)	
Ingress protection level	IP66	
IR range	Up to 30m, Db Los < 50	
Dimensions	95 × 105 × 258.6 mm (3.74" × 4.13" × 10.18")	
Weight	1200g	